





ACCESSORIES AND MODIFICATIONS

Door Accessories and Modifications

APG ONE DOOR \$0	Appliance Garage with One Door ☒ M Used to modify the two lower doors on a Wall Appliance Garage w/ Door Cabinet to a single door. Hinging will be the same as upper door.
BALL CATCH \$0	 Ball Catch ☒ AL Solid Brass Catch & Strike has an adjustable tension feature and is easy to install. The strike may enter from either side or front and is designed for use on all doors. Includes catch & strike, four brass screws, mounting template and instructions. #1 phillips driver, 5/64" diameter drill bit, & a drill are required for installation.
BFD \$173	 Bi-Fold Doors ☒ M 1/8" gap between doors. Each set is hinged together and features a control arm to assist in holding doors open or closed. 2 sets pictured at left. Every attempt will be made to send the pivot arms in applications where possible. If doors can not open the full 170°, the attached door will not fully fold out of the way.
D BATTON \$218	 Door Battened ☒ M Doors attached together with wood batton brace. Doors will maintain the same reveal as the job. This option makes the cabinet custom. Warranty is still based on door size; does not change because doors are joined. Does not delete cabinet mid rail. Cabinet must be entered as a CUSTOM_____, Add D BATTON as a modification.
D STRAPPED \$163	 Door Strapped ☒ M Doors attached together with metal strapping brace. Doors will be pulled together with no reveal between. This option makes the cabinet custom. Warranty is still based on door size; does not change because doors are joined. Does not delete cabinet mid rail. Cabinet must be entered as a CUSTOM_____, Add D STRAPPED as a modification.
DOOR STAY#1 \$326 DOOR STAY#2 \$326	 Door Stay ☒ M One fitting system, two functions; braking or stopping. Easily convertible. Maximum opening angle 110°. We install 2 stays per opening. Available on all door styles. Door Stay #1 used in openings below 12", with a minimum of 8". This is not self-closing. Door Stay #2 features a hydraulic closing option on openings 12" or greater. Maximum opening height 16 ½".
DNH \$0	Door Not Hinged ☒ M Single cabinet door will be shipped loose without hinging or hinge routing to be installed on job site. Add as a modification to the cabinet. SDL (ship door loose) should be added as a separate line # following the cabinet line during order entry to give door a shipping number.
DDPW \$0	Double Door Panel Width ☒ M This modification will change a single panel door insert to a double panel in width. DDPW cannot be used on arched doors. 2 equal panels. This modification will affect any applied panel ends on the cabinet.
OM-BD \$108	Dust Strip ☒ M 1/2" thick same-species strip, attached to the door to serve as a dust strip. Rabbet-routed to the back of the door.

AI=Accessory Installed

AL=Accessory Loose

M=Modification

ACCESSORIES AND MODIFICATIONS

Door Accessories and Modifications

FINISH BACK
\$86

Finish the back of a door ☒M

This modification can be used when an individual door may be visible on the back. On many of our finishes the back of the door will be toned to more closely resemble the front, in some instances the difference is noticeable. Aging (Distressing) will not be applied. See the Information Section for more details.

HINGE
\$11

Frameless Hinge ☒M

Frameless hinge for loose doors. Blum Inserta 120 degree.

Formula for figuring Prepped for Glass Door Sizes

2 1/4" Rails & Stiles - Single Panel

Subtract 3 1/2" from overall width & height of door unless shaker style, then subtract 3 1/4"

3 1/2" Rails & Stiles - Single Panel

Subtract 6" from overall width & height of door unless shaker style, then subtract 5 3/4"

If rail & stile combination is different such as the #71200 the formulas will be based on the two components. This is the opening size only, you may want to order your glass a slightly smaller to ensure proper fit. We strongly recommend using your finished doors for sizing glass. Call your Customer Service Representative for a more accurate estimate. These formulas do not apply to double paneled doors. We cannot provide a formula for arched doors as the route follows the arch.

NEW SELECTION

Metal Glass Doors

Metal Glass Doors ☒M

4 new contemporary metal door frames available in six distinctive finishes and 12 unique inserts to choose. Pricing will depend on frame type and panel insert selected.




AF02

Door Name	AF02
Nomenclature	MD AF02
Rails & Stiles	2 1/8" both
Door Edge	#60 edge - Square
Hinge Type	Special Blum Soft-Close
Finger Pull	Required. 3" accent or matching finish
Dimensions Width & Height	96" Max / 5 1/2" Min
Aventos	Yes; All see page A-28
On-site Drilling Allowed	No. Will damage insert

Additional Notes

- 2 1/8" wide rails and stiles with a stepped profile revealing a 5/16" face perimeter
- Insert thickness is 0.156"
- Standard hinge location will be 4" from the top and bottom of the door. If a third hinge is required due to the height of the door, hinge placement will be centered between the top and bottom hinge holes.

AF02 Frame Profile

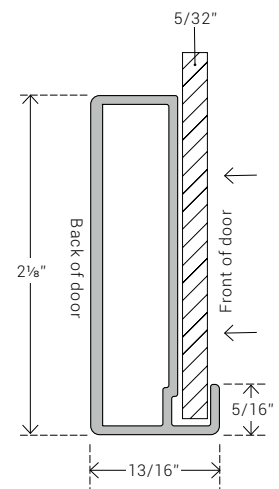

AI=Accessory Installed

AL=Accessory Loose

M=Modification

ACCESSORIES AND MODIFICATIONS

Door Accessories and Modifications

Metal Glass Doors ☒M



AF03



AF04




AF06

Door Name	AF03
Nomenclature	MD AF03
Rails & Stiles	2 1/8" both
Door Edge	#60 edge - Square
Hinge Type	Special Blum Soft-Close
Finger Pull	3" accent or matching finish
Dimensions Width & Height	96" Max / 5 1/2" Min
Aventos	Yes; All <i>see page A-28</i>
On-site Drilling Allowed	Yes

- Additional Notes
- The only metal door that can be drilled for hardware on site.
 - Standard hinge location will be 4" from the top and bottom of the door. If a third hinge is required due to the height of the door, hinge placement will be centered between the top and bottom hinge holes.


AF03 Frame Profile

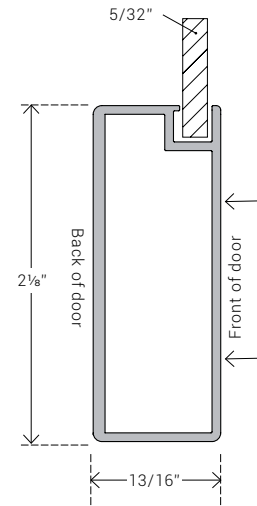

Door Name	AF04
Nomenclature	MD AF04
Rails & Stiles	1 3/4" both
Door Edge	#60 edge - Square
Hinge Type	Special Blum Soft-Close
Finger Pull	Required. 3" accent or matching finish
Dimensions Width & Height	96" Max / 5 1/2" Min
Aventos	Yes; All <i>see page A-28</i>
On-site Drilling Allowed	No. Will damage insert

- Additional Notes
- All glass is tempered safety glass.
 - Standard hinge location will be 4" from the top and bottom of the door. If a third hinge is required due to the height of the door, hinge placement will be centered between the top and bottom hinge holes.


AF04 Frame Profile

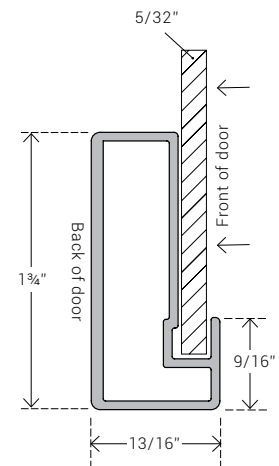

Door Name	AF06
Nomenclature	MD AF06
Rails & Stiles	2 1/8" both
Door Edge	#60 edge - Square
Hinge Type	Special Blum Soft-Close
Finger Pull	Required. 3" accent or matching finish
Dimensions Width & Height	96" Max / 5 1/2" Min
Aventos	Yes; All <i>see page A-28</i>
On-site Drilling Allowed	No. Will damage insert

- Additional Notes
- Only available with Black Gloss (BPG BG) and White Gloss (BPG WG) Back Paint Glass inserts.
 - Standard hinge location will be 4" from the top and bottom of the door. If a third hinge is required due to the height of the door, hinge placement will be centered between the top and bottom hinge holes.

AF06 Frame Profile

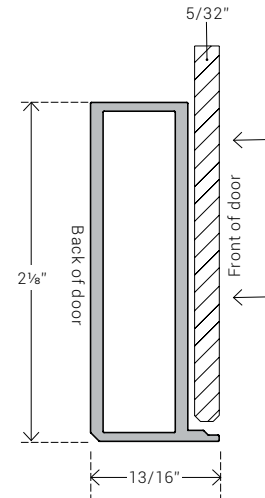

AI=Accessory Installed

AL=Accessory Loose

M=Modification

ACCESSORIES AND MODIFICATIONS

Door Accessories and Modifications

Ordering Glass Doors as a Modification. Priced per cabinet. ☒M

Step 1. Select a metal door style

Door Style	Nom.
AF02	MD AF02
AF03	MD AF03
AF04	MD AF04
AF06	MD AF06



AF02



AF03



AF04



AF06*

Step 2. Select a metal door frame finish

**NOTE: AF06 is only available with Black and White Gloss Back Painted Glass inserts*

Frame Finish	Nom.	Price/ sq.ft.
Natural Aluminum	NA	\$162
Brushed Stainless	BS	\$162
Graphite	GR	\$269
Gold	AU	\$269
Onyx Black Matte	OX	\$212
Bronze Matte	BZ	\$212



Onyx Black
Matte
OX



Bronze Matte
BZ



Graphite
GR



Gold
AU



Brushed
Stainless
BS



Natural
Aluminum
NA

Step 3. Select the center insert style

Insert Type/Style	Nom.	Price/ sq.ft.
Low Iron Clear Glass	GM LIC	\$72
Low Iron Satin Glass	GM LIS	\$128
Clear Glass	GM C	\$72
Satin Glass	GM S	\$72
Regular Reeded Glass	GM RR	\$128
Narrow Reeded Glass	GM NR	\$128
Clear Grey	GM CG	\$72
Bronze Clear Glass	GM BC	\$72
Black Gloss Back Paint Glass	BPG BG	\$128
White Gloss Back Paint Glass	BPG WG	\$128
Linea Ivory 3Form Resin	3FR LI	\$229
Quattro Carbon 3Form Resin	3FR QC	\$229



Low Iron Clear
Glass GM LIC



Low Iron Satin
Glass GM LIS



Clear Glass
GM C



Satin Glass
GM S




Regular Reeded
Glass GM RR



Narrow Reeded
Glass GM NR



Clear Grey
GM CG



Bronze Clear Glass
GM BC



Linea Ivory
3FR LI



Quattro Carbon
3FR QC




**Black Gloss
BPG BG



**White Gloss
BPG WG

Select your Finger Pull (Optional)

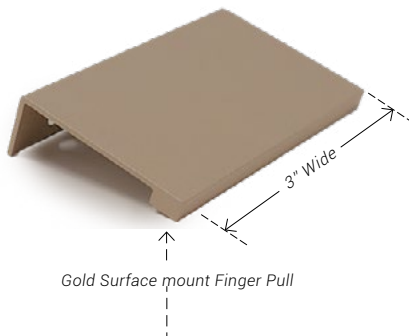

Gold Surface mount Finger Pull

***NOTE: Should NOT use lighting behind Black and White Gloss*

DESCRIPTION	NOMENCLATURE	PRICE/ each
Finger Pull Shipped Loose (Natural Aluminum)	F PULL NA SS	\$19
Finger Pull Shipped Loose (Brushed Stainless)	F PULL BS SS	\$19
Finger Pull Shipped Loose (Graphite)	F PULL GR SS	\$52
Finger Pull Shipped Loose (Gold)	F PULL AU SS	\$52
Finger Pull Shipped Loose (Onyx Black)	F PULL OX SS	\$33
Finger Pull Shipped Loose (Bronze Matte)	F PULL BZ SS	\$33

Finish matches the Frame finish

Additional Hinge & Finger Pull Info, next page

AI=Accessory Installed

AL=Accessory Loose

M=Modification

ACCESSORIES AND MODIFICATIONS

Door Accessories and Modifications

 Continued



Blum 35mm cup screw-in hinge



3" Finger Pull





Hinges for Glass Doors

- Special Blum (Soft Close) 35 mm cup Hinge: 71B3550 screw-in with Inserta Plate: 174H7100E
- Hinges are held in with a self-tapping screw. Part #37072A100 (#7x13mm).
- Standard hinge location will be 4" from the top and bottom of the door. If a third hinge is required due to height of the door, hinge placement will be centered between the top and the bottom hinge holes.

Finger Pulls for Glass Doors

- Finger pulls are 3" wide and can be ordered to match the selected finish on your order, or in an accent finish for an extra touch of style.
- Does not come installed - on site installation is required. All finger pulls are ordered as a separate line item and shipped loose.

SHIPPING Prior to shipping, metal doors will be installed to verify proper fit. After verification, they will be removed, boxed separately, and specially packaged to eliminate the possibility of damage.

LOCK \$138		Lock ☒ M Antique finish lock installed on cabinet door or drawer front. Limited availability on drawer fronts. Not available on mitered doors or fronts. Please call when ordering locks to confirm that the location & application will work.
GD \$0	 Glass Door Cutaway	Glass Doors ☒ M Doors prepped for glass only. Glass is not included. Larger doors are more likely to warp. If single opening is required on oversized doors, specify SDPW &/or SDPW. 50100 & 50200 styles get a 70000 style glass door. Only upper door will be glass. The cabinet doesn't become custom unless they want both upper and lower door to be glass. Except on CWC which has the GD ALL modification. To finish the interior, select FI Finished Interior . See Finish Modifications on This section, on page A-41
GD ALL \$0		Glass Door All ☒ M This modification is reserved for the CWC cabinet (Combination Wall Cabinets) and modifies all the doors (upper and lower) to prepped for glass inserts. Doors will still double panel in height at above 42" unless specified.
GDPINS \$0		Glass Door Pins ☒ AL Provided at no charge, ONLY when requested with glass doors on the original order.
HINGE COVER \$3.60	Hinge Cover ☒ AL Frameless metal hinge cover for arm.	
HDT \$326		Hinge Door Top ☒ M Available on wall cabinets 15"-39" wide & 12"-18" tall. HDT is one door across the width of the cabinet. Doors over 24" wide will be double panel, specify SDPW for single panel. No arched doors over 24"

AI=Accessory Installed

AL=Accessory Loose

M=Modification

ACCESSORIES AND MODIFICATIONS

Door Accessories and Modifications

AVENTOS PULL-UP DOORS ONLY FOR SINGLE OPENING CABINETS		
AVENTOS HF \$756		Pull-up Door - Aventos HF ☒ M Use on cabinets 19" - 42" in height. Use on cabinets 15" - 72" in width. Soft-close feature. Installation will clear crown molding. Minimum cabinet depth is 12". Lift mechanism needs 11" of internal cabinet space in order to function.
AVENTOS HS \$761		Pull-up Door - Aventos HS ☒ M Use on cabinets 13 3/4" - 31 1/2" in height. Use on cabinets 15" - 72" in width. Soft-close feature. Installation will clear most crown molding. Minimum cabinet depth is 12". Lift mechanism needs 11" of internal cabinet space in order to function.
AVENTOS HL \$794		Pull-up Door - Aventos HL ☒ M Use on cabinets 13 5/16" - 22 13/16" in height. Use on cabinets 15" - 72" in width. Soft-close feature. Installation will clear crown molding. Minimum cabinet depth is 12". Lift mechanism needs 11" of internal cabinet space in order to function.
AVENTOS HK \$431		Pull-up Door - Aventos HK ☒ M Use on cabinets 11 13/16" - 24" in height. Use on cabinets 15" - 72" in width. Hardware holds doors open in any position. Soft-close feature. Installation will clear crown molding. Minimum cabinet depth is 10". Lift mechanism needs 9" of internal cabinet space in order to function.

AI=Accessory Installed

AL=Accessory Loose

M=Modification